

MILENCO

3049 Security Door Lock Fitting



Use Gasket to mark drill position




Drill



Mount inside backing plate and insert 4 screws



Mount and tighten 4 screws

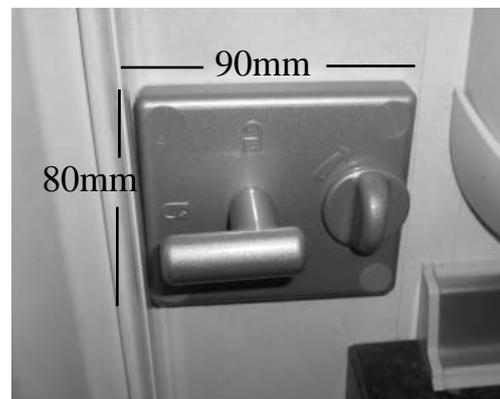

View from the inside

